Berntsen®

Recommended Installation Tools & Accessories

Lixie Hammer

Carsonite Boundary Marker Post
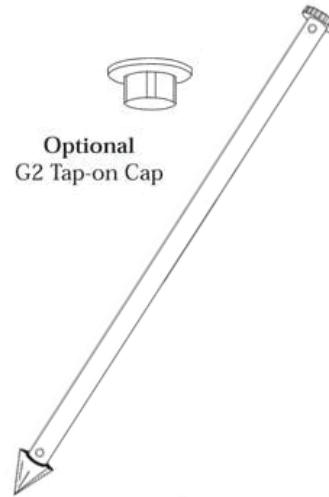

Steel Stamp Set

G2 cap

All tools available at www.berntsen.com

Berntsen®
Marking the Infrastructure of the World.™

Optional
G2 Tap-on Cap

REMEMBER:
"Any Monument Is Only As Good As How It Was Set."

Questions or Comments?

Contact us at:

Berntsen International, Inc.
PO Box 8670
Madison, WI 53708-8670

Call: (800) 356-7388
Fax: (800) 249-9794
surveymark@berntsen.com

www.berntsen.com

Berntsen®
Marking the Infrastructure of the World.™

Installation Instructions

Drive-in Piston Monuments

Models: G1 Series, G3250 and G3325

Materials Required for Setting Monument:

1. Sledgehammer (recommend Lixie Deadblow Hammer LX7, LX10, LX11)
2. Steel stamp set **
3. G1 or G3 Series Drive-In Piston monument
4. G2 Tap-on Cap (Optional for G1 series only)
5. Work gloves and proper eye protection

IMPORTANT: Stamp majority of information on the cap prior to installation.

Monument Installation Instructions:

1. Locate and clear area where monument is to be set.

2. Place G-Series monument at this point and begin driving the monument into the ground keeping the monument as vertical as possible.

3. Installation for G1 or G3: Drive G1 or G3 Series monument into ground until flush or slightly below ground surface. When driving the G3 Series we recommend using the Lixie Deadblow Hammer with the urethane face to prevent defacing the top of the caps.

4. Installation with optional G2 Tap-on cap: Drive monument until top of the monument is approximately six inches (15cm) above ground surface. Take optional G2 Tap-on Cap (making certain optimum amount of information is pre-stamped on the monument prior to setting) and gently tap onto the serrated top knob of the G1 monument. (If using a metal-face hammer, place a piece of wood or leather between cap surface and hammer head to protect against defacing.) Continue to drive G1 monument into ground by driving on G2 cap. Drive monument until flush or slightly below ground surface.

5. Stamp any final required markings on top surface of monument.

6. Tamp or backfill area around monument as necessary.

REMEMBER: "Any Monument Is Only As Stable As Its Backfill."